

# **Company Profile**



Proluxefloor is located in Changzhou Henglin, a town is well known for flooring manufacturing. After more than 20 years of industry ups and downs and the joint efforts of all Proluxefloor people, we have accumulated rich experience in the flooring market, as well as advanced product R&D concept and world-leading manufacturing technology.



# Quality Makes Brand, Brand Makes Value.

Proluxefloor has become a large flooring production base with 100,000 square meters which combines design, manufacture, sales and service. It is one of the fastest growing and promising flooring manufacturers in the vinyl flooring industry. From 2022, Proluxefloor starts to research MSPC, MGO and Water proof Laminate. Proluxefloor plans to start mass pro-duction of these new products from 2023. Proluxefloor is willing to be your potential and best supplier!

# **Company Photo**













# **Style Display**

H

## Comprehensive **System, Promising Future**

The company's development prospects are considerable, with a complete industrial manufacturing base and a well-established product R&D team. At the same time, it uses a modern level of environmental friendly production lines. 12 extrusion lines and 6 slotting lines, with an annual production capacity of 30 million square meters.

Industrious

• Diligent

• Innovation • Technology

Flooring production is the core of the entire enterprise. Proluxefloor adopts advanced and reliable production technology, production equipment, process data, technical and economic indicators.





Meanwhile, Proluxefloor actively uses new production technology and new equipment that have been tested and identified. The selection of equipment considers continuous production and automation. At the same time, uniformity and interchangeability are also considered. Labor protection and three waste treatment measures are taken in the design of the technological process to ensure environmental sanitation. The layout of the workshop should be reasonable, compact, tidy, and economical according to the process requirements and site conditions, and at the same time, the possibility of expanding production and adding new equipment should also be considered.



# Main Product

SPC

#### Specification

1240/1540/1835×182/230× 3.2-7MM+1.5mm EVA

#### Surface

EIR/Wod texture

#### Bevel

Painted Bevel

## VINYL

#### Specification

2mm/2.5mm/3mm dryback 3.2mm/4mm/5mm/6mm click vinyl

#### Surface

Wood Texture

#### Bevel

Micor Bevel

# **New Arrival**

## **MSPC**

## Specification

1215×166×5mm

+1.5IXPE/1.5Cork(Optional)

#### Surface

Wood Texture

#### Finish

Aluminum Oxide (can reach AC5)

#### Bevel

Painted Bevel

## SPC & WPC 05 Wall Panel

## Specification

3000×465/600/960/1250×4-10mm

#### Surface

Flat

## Waterproof Laminate

#### Specification

1215×166×5-12mm +1.5IXPE/1.5Cork(Optional)

#### Surface

Wood Texture

#### Finish

Aluminum Oxide (can reach AC5)

#### Bevel

Painted Bevel

## U-groove WPC



#### Specification

60"×9"/48"×7"×(5.5-10)mm +1.5IXPE/1.5Cork(Optional)

#### Surface

Wood Texture

#### Bevel

U-groove


www.proluxefloor.com





# **SPC(Rigid Core)**

#### Stone Plastic Composite Flooring

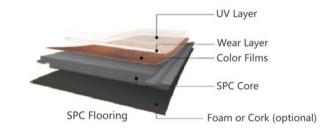

Stone plastic composite vinyl flooring is considered to be an upgraded version of engineered vinyl flooring. SPC rigid flooring is set apart from other types of vinyl flooring byitsuniquely resilient core layer. This core is made from a combination of natural limestone powder, polyvinyl chloride, and stabilizers. This provides an incredibly stable base for each flooring plank. The floors look like any other engineered vinyl floors, with the core completely hidden underneath.


### **Product Specifications**

| Size: 6*36, 7*48, 9*48, 7*60, 9*60, 7*72, 12*24, 18*36 and etc              | Installation: Valinge, i4F                         |
|---|--|
| Thickness: 3.2-8mm  | Underlay: EVA, IXPE                                |
| Near layer: 0.1-1mm   | Feature: 1. Waterproof 2. Anti-scratch             |
| Textures: Embossed, Hand scraped, Crystal, Stone, Registered embossed (EIR) | Certification: Floor score, ISO9000, ISO14001, SGS |
| Core material: 100% virgin  | Customization: Accept                              |

#### **Product Advantages**

- 1.Environmental protection, save the hardwood, save the forest.
- 2. Sound absorption & Soundproof, it is sound insulation can deaden the noise of the room.
- 3. Waterproof & Fireproof, It is water repellent, so the water could not penetrate into the floor.
- 4.Anti-corrosion&long life time, provide the industry with better products and maintenance free for clients .
- 5.Anti-slippery, Slip resistance make it more suitable for kids & the aged family, dance room and badminton court.
- 6.Anti-scratch & Stain repellent, High quality wear layer making it exceptionally stain and scratch resistant.
- 7.Good foot feels, They are warmer underfoot than traditional tile or stone.
- 8.Easy install and maintain, reduces the cost of labor force, economic choose for residential and commercial.
- 9.Eco-friendly, no noxious or chemical component.
- 10.100% Virgin material, It is made from virgin material to ensure the quality of the final product stable.
- 11.NO swelling when exposed to water.
- 12. Durable, will not expand or contract, very stable.

# **Vinyl Flooring**

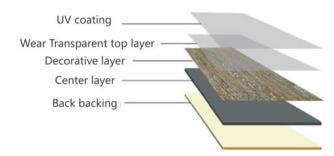

Our vinyl flooring is made by 100% virgin materials. It is a popular choice for many homeowners who want to enjoy the look and feel of wood, stone, or tile at a fraction of the cost. Our range of vinyl flooring is durable, easy-to-maintain that can be installed in any room in your home. Vinyl flooring is also a great choice for those with pets or kids as it 's easy to clean and stain-resistant.

## **Product Specifications**

| ize: 6*36, 6*48, 7*48, 12*24  | Installation: Valinge, I4F,(click vinyl)           |
|---|--|
| hickness: 2mm, 2.5mm, 3mm, 3.2mm, 4mm, 5mm, 6mm                           |  |
| Vear layer: 0.1-1mm   | Feature: 1.Waterproof 2.Sound-resistance           |
| extures: Embossed, Hand scraped, Crystal, Stone, Registered mbossed (EIR) | Certification: Floor score, ISO9000, ISO14001, SGS |
| Core material: 100% virgin  | Customization: Accept                              |

#### Product Advantages

- 1.Environmental protection, save the hardwood, save the forest.
- 2. Sound absorption & Soundproof, it is sound insulation can deaden the noise of the room.
- 3. Waterproof & Fireproof, It is water repellent, so the water could not penetrate into the floor.
- $4. Anti-corrosion \& long\ life\ time,\ provide\ the\ industry\ with\ better\ products\ and\ maintenance\ free\ for\ clients\ .$
- 5.Anti-slippery, Slip resistance make it more suitable for kids & the aged family, dance room and badminton court.
- 6.Anti-scratch & Stain repellent, High quality wear layer making it exceptionally stain and scratch resistant.
- 7.Good foot feels, They are warmer underfoot than traditional tile or stone.
- 8.Easy install and maintain, reduces the cost of labor force, economic choose for residential and commercial.
- 9. Eco-friendly, no noxious or chemical component.
- 10.100% Virgin material, It is made from virgin material to ensure the quality of the final product stable.
- 11.NO swelling when exposed to water.
- 12. Durable, will not expand or contract, very stable.

www.proluxefloor.com www.proluxefloor.com



# New Product-MSPC





MSPC-Also called Melamine SPC, which is an innovation of flooring products. We use melamine paper as top layer instead of film paper, which is same decor as laminate flooring. An aluminum oxide finished overlay seals the surface of the flooring, and protects against scratches and daily wear and tear. So, the overlay has better performance of the PVC wear layer. It also slows the process of fading due to sunlight.

# New Product-5-12mm Waterproof Laminate





Waterproof laminate is another innovation and upgrade based on the traditional laminate products. Its advantage is that compared with the traditional laminate flooring, the waterproof laminate can really be waterproof. While possessing the high performance advantages of scratch resistance and abrasion resistance of the laminate floor, it solves the weakness that the traditional laminate floor is not waterproof all the time. The greatest high light of this new product is not only its thickness can do 5mm, but also the length of EIR laminate can reach 60', which is rarely seen in the market. Once the product is launched, it has been loved and recognized by customers.

www.proluxefloor.com www.proluxefloor.com

# New Product-MWPC





MWPC-Also called Melamine WPC, which is an innovation of WPC flooring products. We use melamine paper as top layer instead of film paper, which is same decor as laminate flooring. An aluminum oxide finished overlay seals the surface of the flooring, and protects against scratches and daily wear and tear. So, the overlay has better performance of the PVC wear layer. It also slows the process of fading due to sunlight.

# New Products - SPC& WPC Wall Panel



There is no doubt that this is another bold application for SPC and WPC products. The advantages of waterproof, moisture-proof, fire-proof, environmental protection, and convenient installation will be fully demonstrated in this product again. The high-gloss finish will look exactly like tile, while a matte finish will give you the real wood feel. The reduced repetition rate of 3D printing technology will bring customers unprecedented visual experience.

Moreover, the particularity of the product allows users to customize any length, which saves the trouble of joints and greatly improves the installation efficiency.

## **Advantages:**

#### Noise Reduction

The bottom layer of SPC/WPC wall panel is designed to absorb sound waves, making it an ideal choice for noise barriers or soundproofing walls. SPC/WPC wall panel has excellent sound absorption properties and can reduce the amount of noise that enters a room by up to 50%.

## Stain proof and easy to clean


SPC/WPC wall panel is not only 100% waterproof but also stain resistant, which means it requires low maintenance. A simple wipe down with a damp cloth is all it takes to keep them looking great.



www.proluxefloor.com www.proluxefloor.com = 10



# New Products-Pressed Big U-groove WPC or SPC

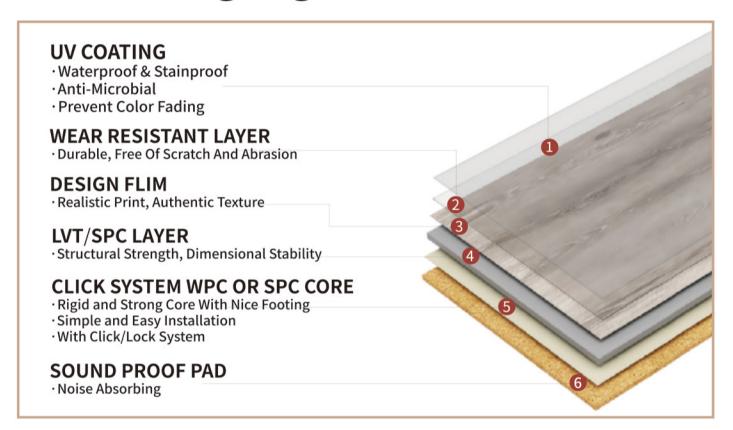



This new product is another bold innovation based on traditional WPC flooring. The U-groove technology we adopted can make each piece of the floor distinctive and vividly displays the three-dimensional effect, which can completely match or even surpass the effect of solid wood flooring, making it look more high-end and feel more like real wood. At the same time, the new technology perfectly solves the problem that the dust on the floor surface caused by V-groove which is not easy to take care of, making cleaning more convenient. We believe this will undoubtedly be one of the most eye-catching products at this year.



# Pressed Big U-groove WPC or LSPC

#### DV562 EIR



## DV563 EIR

## Size:

9"×60" T: 6-10mm








www.proluxefloor.com

www.proluxefloor.com

:: 11






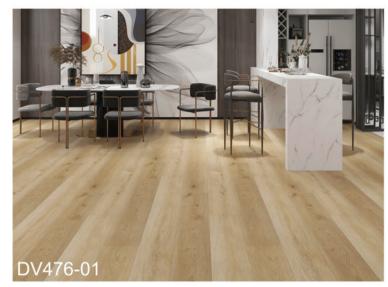







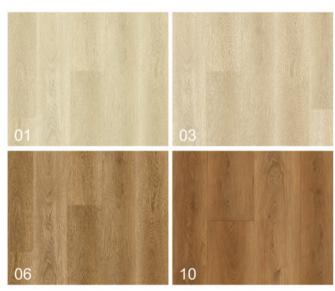





**size:** 7.25"x48" / 9"x48" / 7.25"x60" / 9"x60" 7"x72"/9"x72"







www.proluxefloor.com

www.proluxefloor.com

<<< more





**Stone Series Collection** 





**Stone Series Collection** 



more >>>







more >>>



<<< more









www.proluxefloor.com

<<< more





**Stone Series Collection** 

size:

12"x24"





**Herringbone Collection** 

size:

640x128mm 750x150mm












www.proluxefloor.com

www.proluxefloor.com

more >>>

Wall Panel Collection Length: 2400mm-3600mm Width: 475mm/600mm/960mm/1220mm

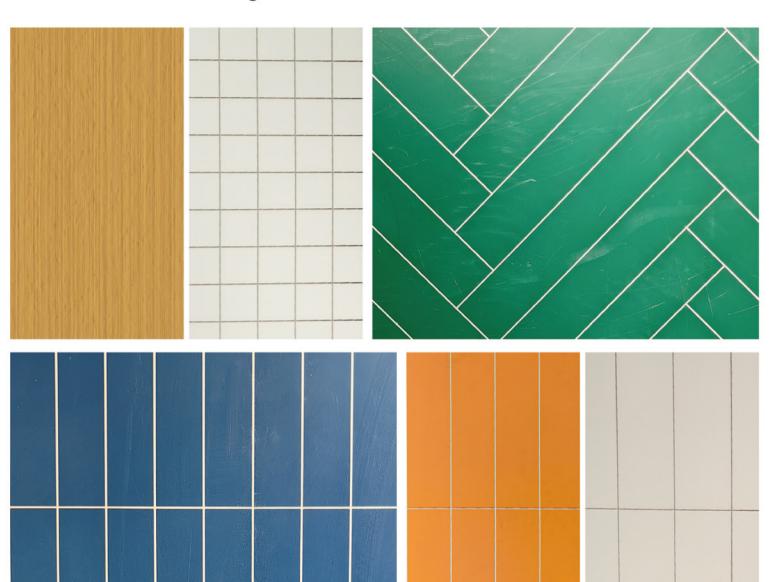


Usage scenario
toilet
bathroom
Shower room







more >>> Interpreting various styles of home furnishings

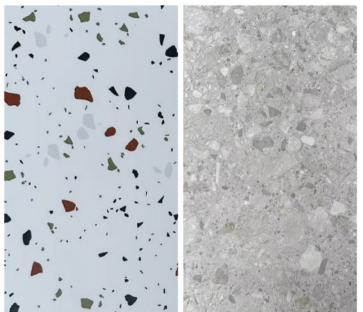







Usage scenario toilet bathroom

Shower room







www.proluxefloor.com

www.proluxefloor.com



# **Underpad Options**







## **INSTALLATION INSTRUCTIONS**

#### **PREPARATION**

- 1.SUITABLE SURFACES
- 2. The vinyl planks should be allowed to acclimatize at room tempersture (approx 20°C/68°F) for 48 hours prior to installation.
- 3.TOOLS And SUPPLIES: Utility knife, tapping block, rubber mallet, spacers, pencil, tape measure, ruler and safety goggles.



First plank min length 400 mm. Put a spacer

distance between short ends of panels in

parallel rows shall not be less than the given

Place the panel gently and close to the short

end of the previous panel and fold it down in

Staggered joint distance i.e. minimum

against the left wall.


Second plank second row

a single action movement.

#### **General installation instructions**



First plank, first row Place a spacer with predicted thickness to the left and position the panel against the wall. Later, after 3 rows, you can easily position the flooring against the front wall with predicted





When folding down it is important to start from the corner closest to the previous row, folding down towards the center, and continue towards the opposite long side. During the fold down, make sure the panels are close to each other.



Afterwards press slightly along the short end just installed.



After 2-3 rows
Adjust the distance to the front wall by placing spacers.



At the end of the first row, put a spacer to the wall and measure the length of the last plank to fit.



Last row (and perhaps also first row).

Minimum width 50 mm. Place a spacer to the wall before measuring. Make a simple drawing tool (piece of wood with a hole) and mark the panel along the wall. Cut the panels lengthwise including the flexible tongues.

# **Perfect Accessories**

As well as being easy to install Licheer offers a full range of accessories to complement your LVT & Engineered vinyl flooring. We also have everything you need for the perfect finishing touch.

Every decor has the matching profile, skirtings, reducer, stairnose, T-moldingand so on, so enjoying your Divine flooring is easy with our accessories.



The floor slab between stair beams, that is, the stressed part supporting the tread plate



For use as staircase step nosing



For covering expansion gap on walls



For connecting flooring with edages and along different thickness of adjoining lower surface or floors



For transition between floors of the same level



For proper borders of different floor levels



For use as staircase step nosing

Quarter Round

Quarter Round creats a subtle blend between floor and the wall

- > Fast ,invisible and clean installation of your skirting
- > Can be fitted and dismantled again and again without damage
- > Easy to use, even on floors which have already been laid
- > 4-pole cables can be invisibly laid
- > Despite dimensional stability, optimally adapts to irregular masonry
- > Hign in quality, yet reasonably priced

www.proluxefloor.com www.proluxefloor.com